

DESIGNED FOR SPECIAL REQUIREMENTS

SPECIAL

INDUCTIVE SENSORS

KEY ADVANTAGES

- ✓ Double sheet detection (steel and aluminum) with sensitivity of 0.8 - 1.2 mm per sheet
- ✓ Full Inox: extremely robust one-piece stainless-steel housing,
- ✓ Corrosion resistant
- ✓ IP 68 and IP 69K
- ✓ Pressure resistant up to 80 bar

RANGE OVERVIEW

Housing size

Full Inox

SPECIAL

M30

p. 165

FAMILY


HOUSING SIZE MM

OPERATING DISTANCE MM

INDUCTIVE

WIRING DIAGRAM

PNP NO

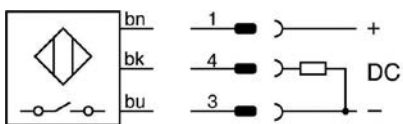

DATA

Housing material

Connection

Degree of protection

Mounting

Max. switching frequency

Supply voltage range

Ambient temperature range

Output current

PNP NO


Description

SPECIAL

FULL INOX

M30

3 ... 5

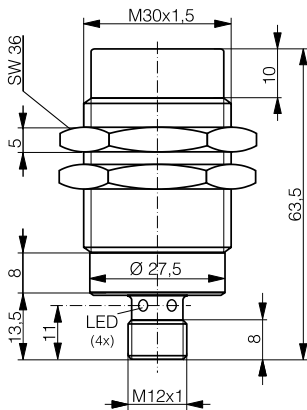

Inductive

Photoelectric

Ultrasonic

Capacitive

Safety

RFID

Connectivity

Accessories

Glossary

Index

Stainless steel V2A

Connector S12

IP 68 / IP 69K

Non-embeddable

10 Hz

10 ... 30 VDC

-25 ... +70°C / -13 ... +158°F

≤ 200 mA

DW-AS-713-M30-618

Double sheet